


SPECIFICATIONS

MODEL		RSP8N2		RSP19N2/RSP19N2-MH () dimension is -MH			RSP38N2/RSP38N2-MH () dimension is -MH					RSP67N2/RSP67N2-MH () dimension is -MH								
S.I.RANGE[N · m]		2~9		4~14.1			4~21			9~24.2		9~29.5			9~42		14~59		14~73	
METIRC RANGE[kgf · cm]		20~90		40~141			40~210			90~242		90~295			90~420		140~590		140~730	
WIDTH ACROSS FLATS [mm]		8	10	8	10	13	10	12	13	14	16	17	14	16	17	18	19			
MAX. HAND FORCE [N]		62		82			122			128		156			222		232		287	
DIMENSION [mm]	EFFECTIVE LENGTH	L	146			173			190					255						
	OVERALL LENGTH	L'	192	193	220 (220)	221 (221)	223 (223)	244 (244)	247 (247)	246 (246)	247 (247)	248 (248)	312 (311)	313 (312)	314 (313)	315 (314)				
	HEAD	C	15	17.5	15	17.5	21.5	17.5	20.4	21.5	23	25.5	26.5	23.5	26.5	27.5	28.5	29.5		
		b	5			6			7		8		9		10		11		12	
		h	21			20			22		23		24		25		26		27	
		ℓ1	36			40			45					53						
		ℓ2	0.8	1	0.8		1.1	1		1.3	1.4		1.3	1.6		1.7				
	BODY	m	19					25.5												
		n	9.2					11.2												
		d	15					20												
D		24	29 (15)			30 (20)														
WEIGHT [kg]		0.15		0.21			0.38					0.47								
THRUSTRING TOOL [OPTIONAL ACCESSORY]		No.931					No.930													
Accuracy ±3%																				


MODEL		RSP120N2/RSP120N2-MH () dimension is -MH					RSP160N2/RSP160N2-MH () dimension is -MH				RSP220N2/RSP220N2-MH () dimension is -MH			RSP310N2/RSP310N2-MH () dimension is -MH			
S.I.RANGE[N · m]		24~100			24~120		30~160				45~220			65~255	65~310		
METIRC RANGE[kgf · cm]		240~1000			240~1200		300~1600				450~2200			650~2550	650~3100		
WIDTH ACROSS FLATS [mm]		17	18	19	21	22	19	21	22	24	22	24	27	24	27	30	
MAX. HAND FORCE [N]		299			359		479				526			504	415		
DIMENSION [mm]	EFFECTIVE LENGTH	L	334					334				418			615		
	OVERALL LENGTH	L'	393 (393)	394 (393)	394 (394)	396 (395)	396 (396)	395 (394)	396 (395)	396 (396)	398 (397)	480 (479)	481 (480)	483 (482)	678 (678)	680 (680)	682 (681)
	HEAD	C	29.4	30.6	31.8	34	35	32.8	34	35	38	38.4	40	45	41.8	45	50
		b	12			13		13		15		13			15		
		h	28			29		29		31		29.5			32		
		ℓ1	62.5					62.5				70			75		
		ℓ2	1.7	1.8	1.9	1.5		1.9	1.5		1.9	2.2	2	2.7	2.4	2	3
	BODY	m	28					28				35					
		n	12.2					12.2				15					
		d	21.7					21.7				27.2					
D		34 (21.5)			34 (21.5)		34 (21.5)			38 (27)							
WEIGHT [kg]		0.8					0.9				1.5			2			
THRUSTRING TOOL [OPTIONAL ACCESSORY]		No.930															
Accuracy ±3%																	

Notes
Models RSP8N2 to RSP310N2 have a resin grip, while RSP2-MH has a metal grip.

DIMENSIONS

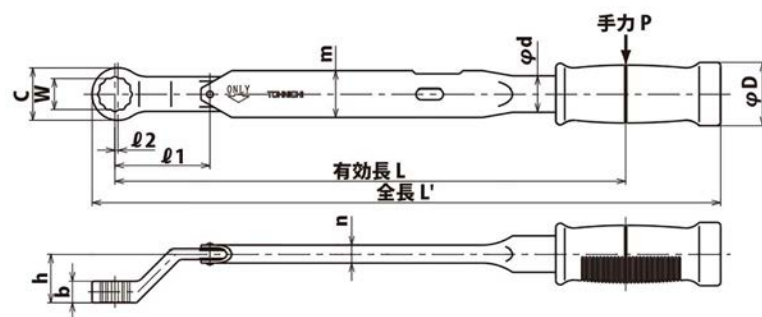

RSP8N2~310N2

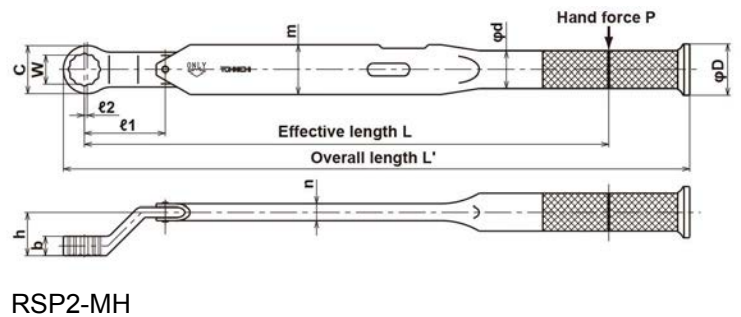

RSP2-MH